

Machine Series: ALB


Side Labeling Machine



Speed:
Up to 35 m/min

Technical Details:

- stainless high-grade steel casing
- programmable logic controller via touch screen
- highly accurate labeling, ± 1 mm tolerance
- servo-controlled labeling head; labeling speed is automatically synchronized with product throughput speed
- with bottle positioner and bottle separation device (depending on the model)
- with automatic push& press sponge installation ensuring a crease- and bubble-free labeling (depending on the model)

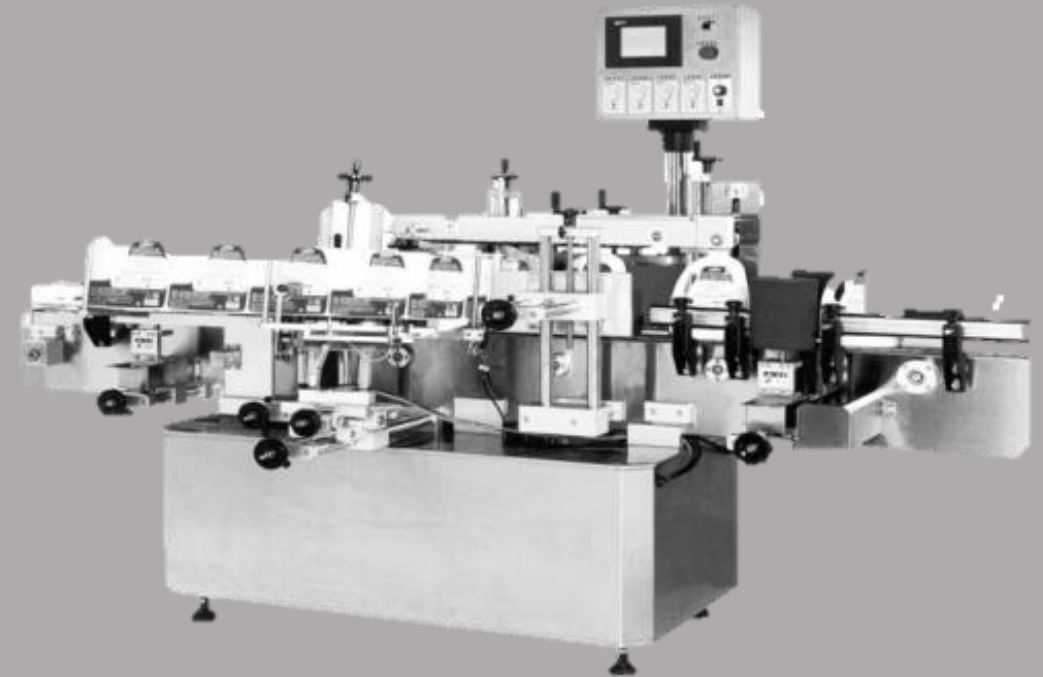

Machine Specifications:

Model:	ALB-210A	ALB-215	ALB-515	ALB-620	ALB-620R	ALB-625
Label Width:	10-110 mm	A:10-110 mm C:10-170 mm*	A:10-110 mm C: 10-170 mm*	A:10-110 mm C:10-170 mm D: 10-220 mm*	A:10-110 mm C:10-170 mm D: 10-220 mm*	A:10-110 mm C:10-170 mm D:10-220 mm*
Label Length:	10-250 mm*	15-80 mm*	10-300 mm*	10-250 mm*	10-250 mm*	10-250 mm*
Product Diameter / Width:	15-160 mm	10-25 mm	25-100 mm	30-100 mm (larger sizes on request)	30-100 mm (larger sizes on request)	30-100 mm (larger sizes on request)
Labeling Speed:	12-35 m/min	12-35 m/min	12-35 m/min	12-25 m/min	12-25 m/min	12-25 m/min
Reel Diameter:	-	-	inner 76 mm / outer 360 mm	inner 76 mm / outer 360 mm	inner 76 mm/ outer 360 mm	inner 76 mm/ outer 360 mm