


# Machine Series: STPE

Shrink Tunnel



Speed:  
Up to 30 m / min

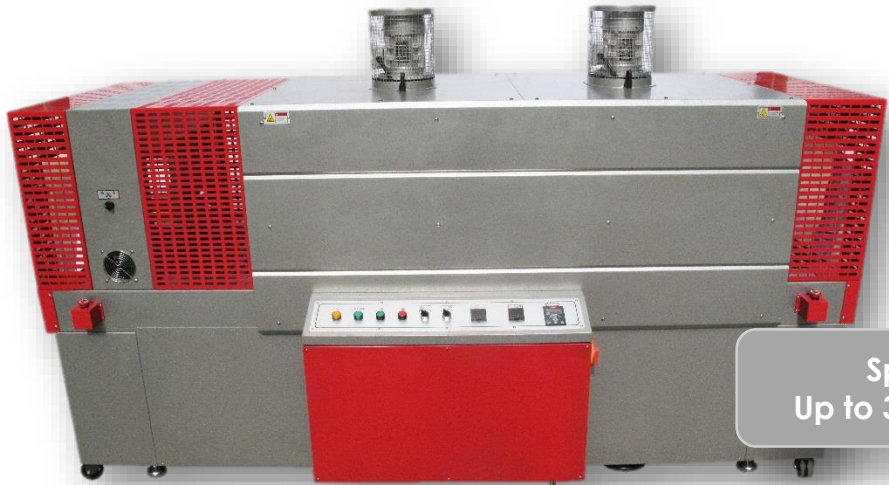

## Technical details:

- infinitely variable adjustment of temperature and conveyor belt speed
- energy-saving solid-state relay control (SSR)
- Safety covers for ongoing operation
- integrated film cooling fan (standard)
- separately adjustable heating chambers
- Control cabinet with integrated control panel
- insulated inlet / outlet curtains for low heat loss

## Product Samples:



Inform yourself about our optional accessories:

- PE shrink film
- Bundling machine
- L-bar sealer

Model:	STPE-6040	STPE-6040H	STPE-8040	STPE-10040	STPE-12540
Tunnel Bonnet (L x W x H):	1200 x 600 x 400 mm	1200 x 600 x 400 mm	1800 x 800 x 400 mm	1800 x 1000 x 400 mm	1800 x 1250 x 400 mm
Max. Product Size (W x H):	550 x 380 mm	550 x 380 mm	750 x 380 mm	950 x 350 mm	1250 x 350 mm
Machine Size (L x W x H):	2800 x 970 x 1600 mm	2800 x 970 x 1600	2800 x 1170 x 1600 mm	2800 x 1370 x 1600 mm	2800 x 1620 x 1600 mm
Conveyor Belt Speed:	15 m / min	20 m / min	20 m / min	20 m / min	20 m / min
Max. Connected Load:	12,0 kW	18,0 kW	21,0 kW	30,0 kW	30,0 kW
Voltage:	400 V / 3 phases	400 V / 3 phases	400 V / 3 phases	400 V / 3 phases	400 V / 3 phases
Machine Weight (approx):	420 kg	600 kg	850 kg	1000 kg	1200 kg