


Machine Series: SW Premium

Stretch Wrapper / Pallet Wrapper

Technical Details:

- Clearly arranged control panel
- Preselectable winding programs: Head and foot wraps, cross spiral, spiral or rainproof
- Infinitely adjustable lifting carriage and turntable speed
- Integrated transport recesses
- Automatic height detection by means of photocells
- Quick change system of the film roll
- Electronically soft controlled start and stop
- Fixed stop of the turntable in starting position
- Flexible control panel, rotatable up to 90

Pre-stretch function with up to 300% pre-stretch of the stretch films

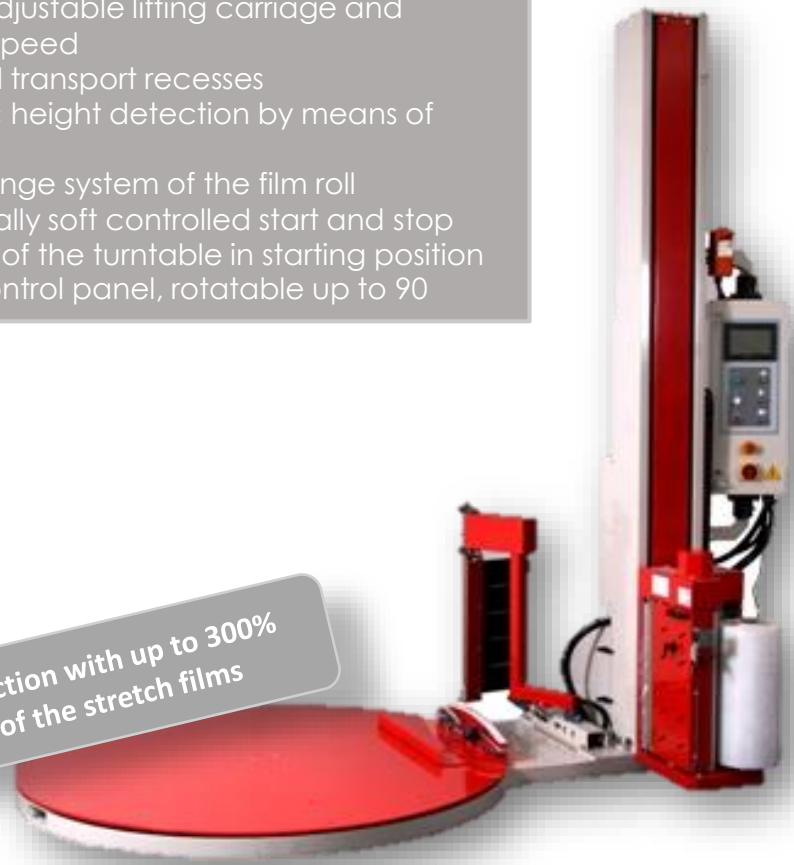

Stretch Film



Additional Options:

- Loading ramp for pallet truck or electric pallet truck
- Product sensor for black foils/products
- Turntable diameter 1850mm (incl. max. pallet weight 2000 kg)
- Turntable with lift truck recess 1650mm (incl. max. pallet weight 1200 kg)
- Wrapping mast for pallet heights up to 3000 mm
- Pallet hold-down device (suitable for light pallets/products)
- Integrated digital weighing system (up to 1.65 m turntable diameter)
- Photocell for detection of black stretch film

Model:	SW-108	SW-308	SW-501
Turntable Diameter:	Ø 1650 mm	Ø 1650 mm	Ø 1800 mm
Turntable Speed:	Up to 12 rpm	Up to 12 rpm	Up to 12 rpm
Max. Pallet Height:	2500 mm	2000 mm	2500 mm
Max. Pallet Weight:	1650 kg	1650 kg	1800 kg
Air Pressure (dry air):	-	-	6,0 bar
Supply Voltage:	230 V, 50 Hz	230 V, 50 Hz	230 V, 50 Hz
Max. Connected Load:	0,8 kW	0,8 kW	1,4 kW
Pre-Selectable Winding Programs:	4	3	4
Control Panel (flexible):	Analog (Yes)	Analog (No)	Analog, Digital (Yes)
Automatic Film Attachment:	No	No	Yes
Automatic Film Separation:	Yes	Yes	Yes
Automatic Film Stripping:	No	No	Yes