


# Maschinenserie: SWS Box Motion

Automatic Side Sealing Machine  
(continuous cycling)

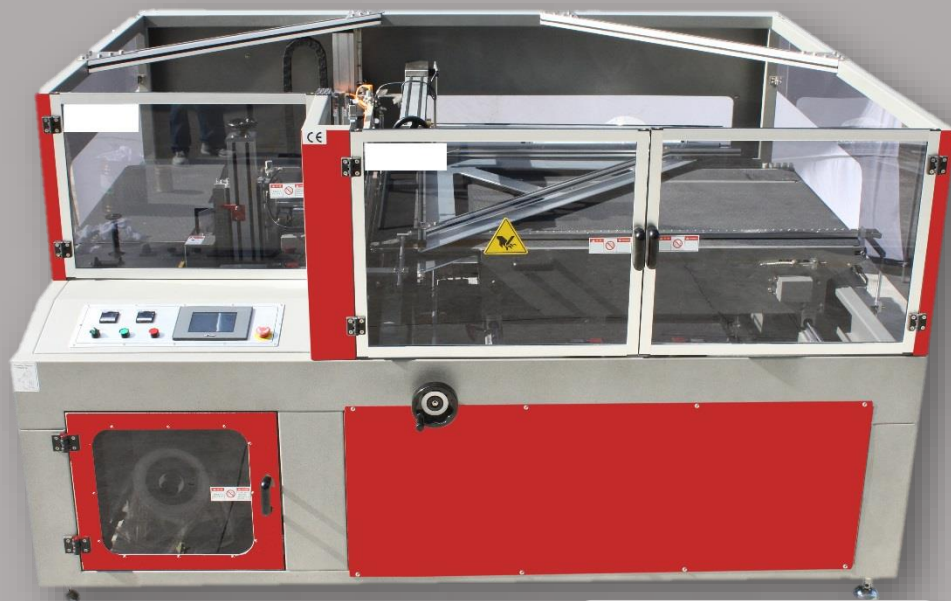

Speed:  
Up to 100 pcs / min

## Technical Details:

- **Permanently heated transverse and lateral sealing**
- Simple touchscreen operation via colour symbols
- **Individually storable product programs**
- Single and multi-product bundling possible
- **Stainless steel version possible- Automatic residual development of excess film**
- Integrated piece counter and print mark control
- **Safety protection covers / alarm signal lamp**
- Continuous longitudinal sealing, no product length limitation
- **Servo-controlled motor drive for sealing systems and conveyor belts**
- Perforating needle rollers; mounted on rubber roller



Side Sealing  
(upstream)



Transverse Sealing



PRODUCT SAMPLES

Model:	SWS-5020FM
Usable Films (center folded):	POF / PP / PE
Sealing Blade Width:	500 mm
Sealing Mechanism 1:	Longitudinal Sealing (pneumatic)
Sealing Mechanism 2:	Moving Transverse Sealing (servomotor)
Max. Product Height:	199 mm
Max. Format Width (W x H):	450 mm
Max. Roll Size (L x Ø):	600 x Ø 300 mm
Conveyor Belt Speed:	35 m / min
Max. Connected Load:	4,5 kW
Machine Weight (approx.):	450 kg
Sealing Speed:	Up to 100 pcs / min